
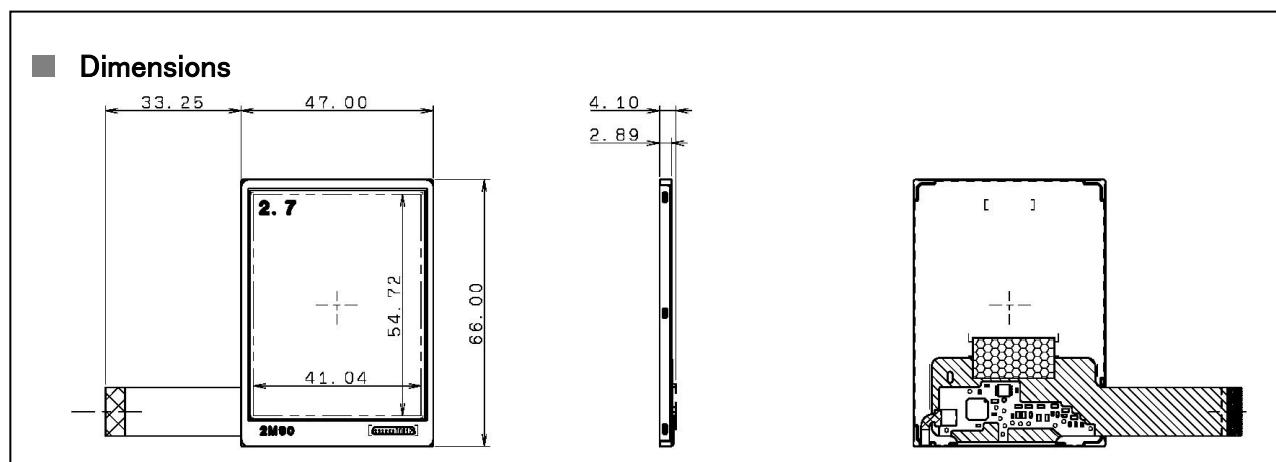


■ Features

- Portrait, 2.7 inch QVGA resolution.
- High outdoor readability with low backlight power.
- Wide viewing angle LCD module.
- TC, Power-circuit on panel.



■ Specifications

RoHS compliant

Items	Specifications	Units	Notes
Display Size	6.8 (2.7)	cm (inch)	
Display Format	240 X RGB X 320 Stripe	--	
Dot Pitch	57.0(H) X 171.0(V)	μm	
Outline Dimensions	47.0 (H) X 66.0 (V) X 2.89 (D)	mm	
Weight	19.0	g	
Number of Colors	262,144	--	
Brightness	400 (TYP)	cd/m ²	at 10mA
Viewing Angle(U/D/L/R)	80/80/80/80	deg.	CR ≥ 10
Input Signal Type	Digital RGB signal (each 6 bit parallel)	--	
Power Supplies	3.0 (without B/L)	V	
Operating Temperature	-20 ~ +70	°C	
Storage Temperature	-30 ~ +80	°C	
Backlight	LED Backlight	--	
Remarks	The adjustment of VCOMDC value is not required.		

※ Specifications are subject to change without notice.

20010/04/01

ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan

TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact