


■ Features

- Portrait, 3.7 inch VGA resolution with touch panel.
- High outdoor readability with low backlight power.
- With standard Glass-Film type touch panel.
- TC, Power-circuit on panel.

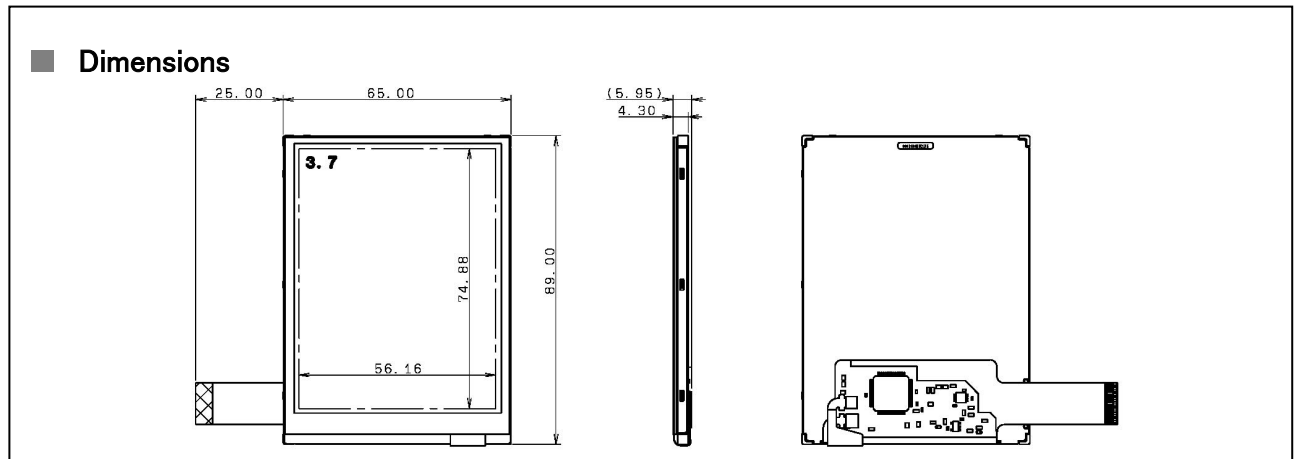

■ Specifications

RoHS compliant

| Items | Specifications | Units | Notes |
|------------------------|---|-------------------|--------------|
| Display Size | 9.4 (3.7) | cm (inch) | |
| Display Format | 480 X RGB X 640 Stripe | -- | |
| Dot Pitch | 39.0(H) X 117.0(V) | μ m | |
| Outline Dimensions | 65.0 (H) X 89.0 (V) X 4.30 (D) | mm | |
| Weight | T.B.D. | g | |
| Number of Colors | 262,144 | -- | |
| Brightness | 250 (TYP) | cd/m ² | at 10mA |
| Viewing Angle(U/D/L/R) | 15/50/35/35 | deg. | CR \geq 10 |
| Input Signal Type | Digital RGB signal (each 6 bit parallel) | -- | |
| Power Supplies | 3.0 (without B/L) | V | |
| Operating Temperature | -20 ~ +70 | °C | |
| Storage Temperature | -30 ~ +80 | °C | |
| Backlight | LED Backlight | -- | |
| Remarks | The adjustment of VCOMDC value is not required./Touch panel (Glass-Film, Clear finish on surface) | | |

※ Specifications are subject to change without notice.

2010.04.01

ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan

TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact