


#### ■ Features

- Landscape, 4.1 inch QVGA resolution.
- High outdoor readability with low backlight power.
- Super Slim / Super Light LCD module using long-life LED.
- Wide viewing angle LCD module.
- TC, Power-circuit on panel.

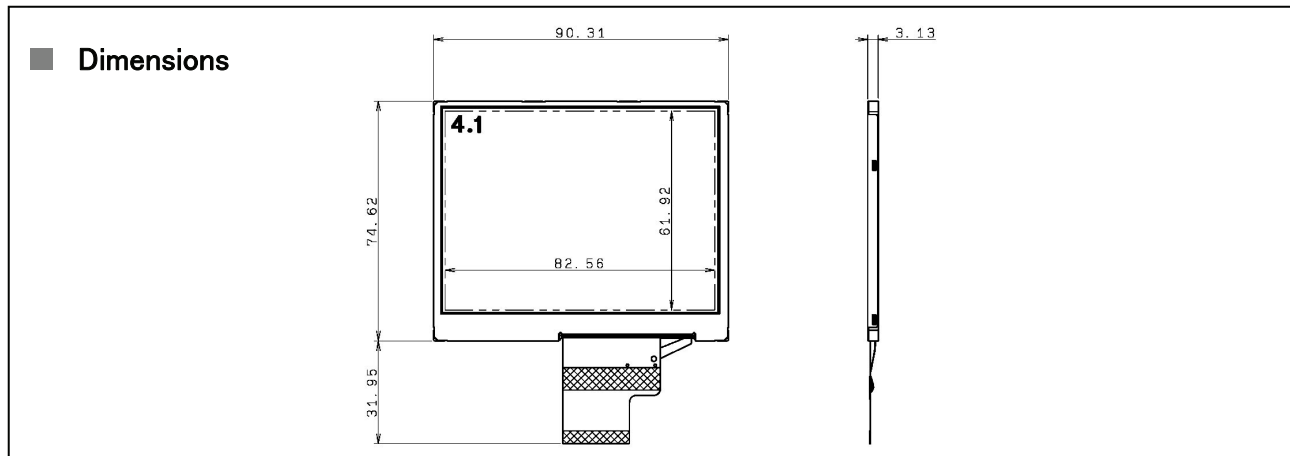

#### ■ Specifications

RoHS compliant

Items	Specifications	Units	Notes
Display Size	10.3 (4.1)	cm (inch)	
Display Format	320 X RGB X 240 Stripe	---	
Dot Pitch	86.00(H) X 258.00(V)	μm	
Outline Dimensions	90.31 (H) X 74.62 (V) X 3.13 (D)	mm	
Weight	42.4	g	
Number of Colors	262,144/16,777,216	---	*1
Brightness	350 (TYP)	cd/m <sup>2</sup>	at 10mA
Viewing Angle(U/D/L/R)	80/80/80/80	deg.	CR ≥ 10
Input Signal Type	Digital RGB signal (each 6/8 bit parallel)	---	*1
Power Supplies	3.0 (without B/L)	V	
Operating Temperature	-20 ~ +70	°C	
Storage Temperature	-30 ~ +80	°C	
Backlight	LED Backlight	---	
Remarks	*1 Each 6/8 bit can be selected by change of mode.		

※ Specifications are subject to change without notice.

April 1, 2010

## ORTUS TECHNOLOGY CO., LTD.

Sales HQ, Overseas Sales Dept.

2951-5 Ishikawa-machi, Hachioji City, Tokyo 192-8556, Japan  
 TEL +81-42-639-5121 FAX +81-42-639-5034

<http://www.ortustech.co.jp>

All Rights Reserved, Copyright (C) ORTUS TECHNOLOGY CO., LTD.

Contact